


# XML-Structure

## Root-Element: b2bOpticJobData

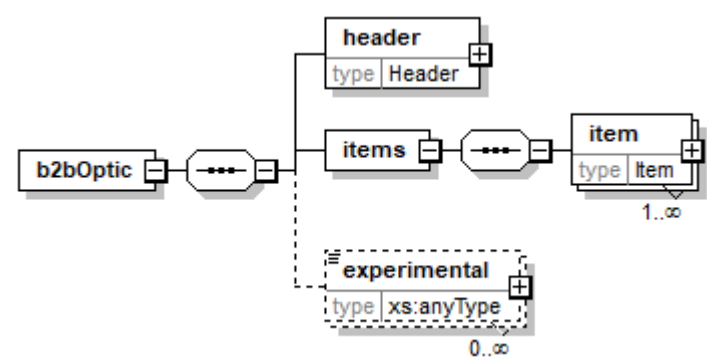

In the root-element the location of the XSD at [schema.b2boptic.com](http://schema.b2boptic.com) must be set, so the receiver could identify the version of XML.

```
<b2bOpticJobData xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xsi:noNamespaceSchemaLocation="http://schema.b2boptic.com/b2boptic_jobdata_v
1.6.3.xsd">
```

|                                |                                                            |
|--------------------------------|------------------------------------------------------------|
| <b>header</b>                  |                                                            |
| type                           | Header                                                     |
| occurs                         | 1                                                          |
| description                    | head section with information about all orders in this xml |
| <b>items</b>                   |                                                            |
| type                           | sequence of item                                           |
| occurs                         | 1                                                          |
| description                    | main tag that include a list of order items                |
| <b>item (element of items)</b> |                                                            |
| type                           | Item                                                       |
| occurs                         | 1..n                                                       |
| description                    | one order                                                  |
| <b>experimental</b>            |                                                            |
| type                           | anyType                                                    |
| occurs                         | 0..n                                                       |
| description                    | section for internal tests at development                  |

```
<xs:element name="b2bOpticJobData">
  <xs:complexType>
    <xs:sequence>
      <xs:element name="header" type="Header"/>
      <xs:element name="items">
        <xs:complexType>
          <xs:sequence>
            <xs:element name="item" type="Item" maxOccurs="unbounded"/>
          </xs:sequence>
        </xs:complexType>
      </xs:element>
      <xs:element name="experimental" type="xs:anyType" maxOccurs="unbounded"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

```
</xs:sequence>
</xs:complexType>
</xs:element>
<xs:element name="experimental" type="xs:anyType" minOccurs="0"
maxOccurs="unbounded"/>
</xs:sequence>
</xs:complexType>
</xs:element>
```

From:

<https://wiki2.b2boptic.com/> - **wiki2.b2bOptic.com**

Permanent link:

<https://wiki2.b2boptic.com/en:jobdata:version010603:structure>

Last update: **2017/06/19 18:08**

