


item (Item)

b2bOpticJobData → items → item

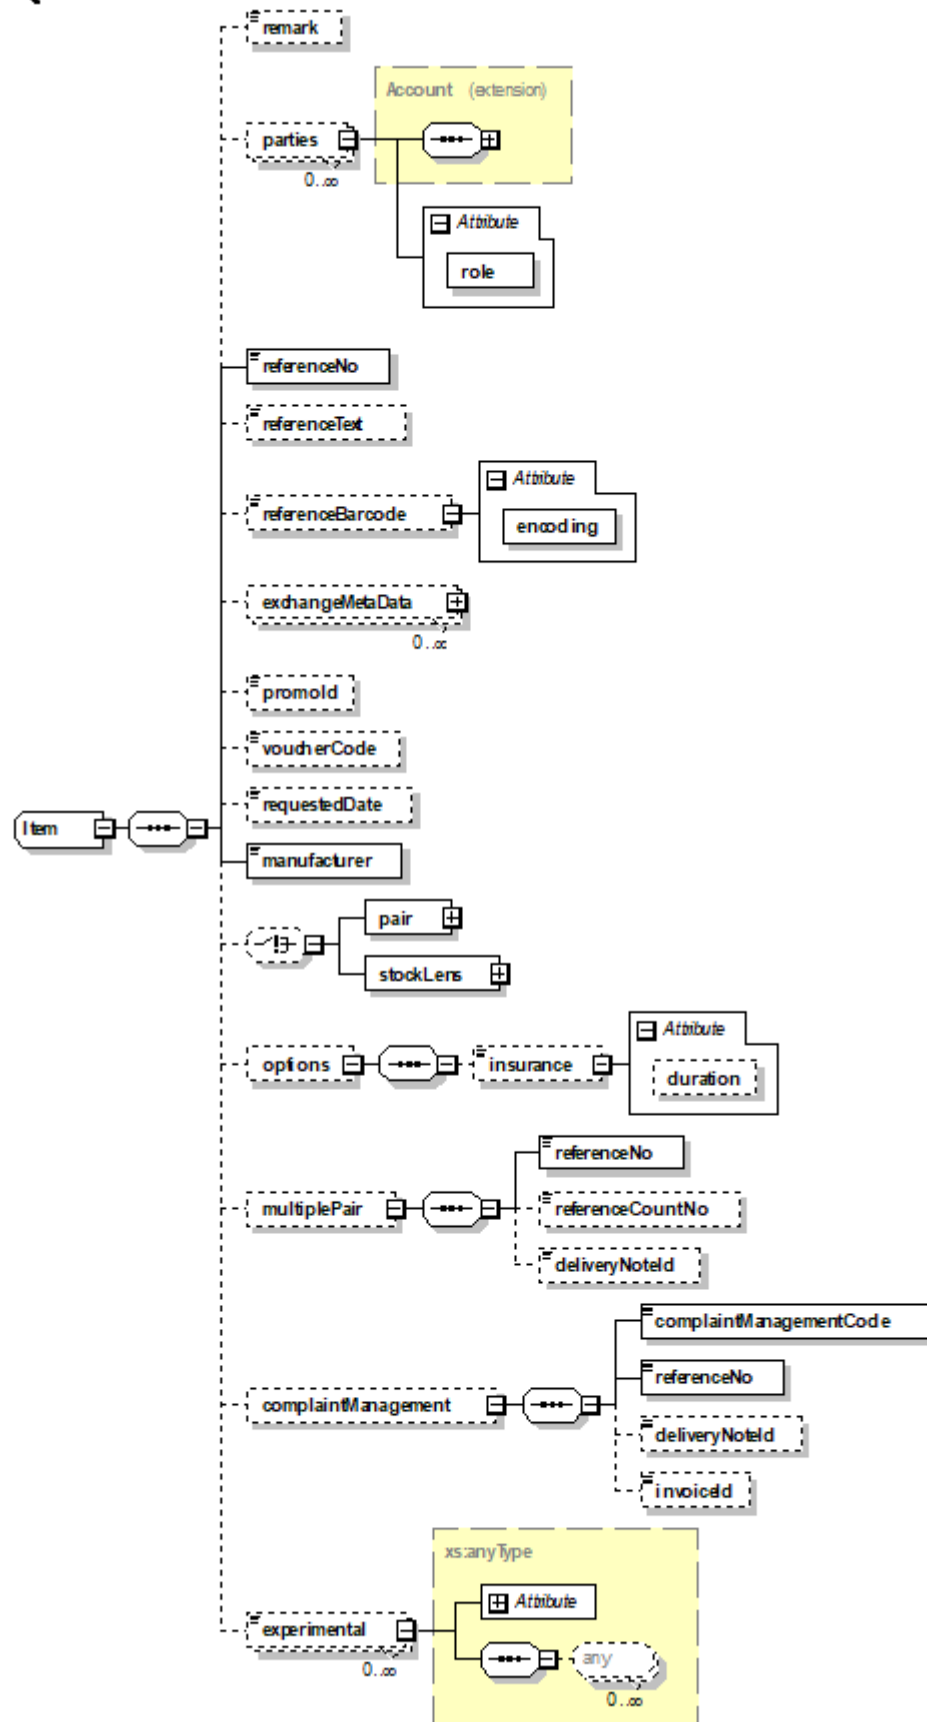

remark	
type	string
occurs	0..1
description	comments of the customer to this order

parties	
type	Account
occurs	0..n
description	overrides the defaults of orderParties

[role \(attribute of parties\)](#)

type	Roles
use	required
description	

referenceNo	
type	string
occurs	1
description	job number by customer

referenceText	
type	string
occurs	0..1
description	commission of the order by customer

referenceBarcode	
type	string
occurs	0..1
description	data of a barcode that is a reference for this job; the barcode should be printed on the lens paper bag or delivery documents

[encoding \(attribute of referenceBarcode\)](#)

type	BarcodeEncoding
use	required
description	the encoding of the barcode

ISNEWLO010604 exchangeMetaData	
type	B2BJobDataExchangeMetaData
occurs	0..n
description	to exchange meta data between sessions

ISNEWLO010604 promold	
type	string
occurs	0..1
description	ID to a promotion

ISNEWLO010604 voucherCode	
type	string
occurs	0..1
description	voucher Code

requestedDate	
type	date
occurs	0..1
description	day when the order should be delivered, if possible

manufacturer	
type	string
occurs	1
description	name of manufacturer
pair	
type	Pair
occurs	1
description	order lenses for end customer
stockLens	
type	StockLens
occurs	1
description	order lenses for stock
options	
occurs	0..1
description	
insurance (element of options)	
type	boolean
occurs	0..1
default	false
description	the lenses of pair or stockLens should be delivered with insurance
ISNEWLO010604 duration (attribute of insurance)	
type	duration
use	optional
description	duration of the insurance
multiplePair	
occurs	0..1
description	the ordered lenses are related to another order, e.g. for discount
referenceNo (element of multiplePair)	
type	string
occurs	1
description	the referenceNo of the order that this are related to
referenceCountNo (element of multiplePair)	
type	integer
occurs	0..1
description	a counter of related orders to the first one (1: first order; 2: first order that is related to the order with 1)
deliveryNoteld (element of multiplePair)	
type	string
occurs	0..1
description	the id of the deliverynote of the first order
ISNEWLO010604 complaintManagement	
type	
occurs	0..1
description	complaint Management
ISNEWLO010604 complaintManagementCode (Subelements of complaintManagement)	
type	string

ISNEWLO010604 complaintManagementCode (Subelements of complaintManagement)	
occurs	1
description	Code of complaint management
ISNEWLO010604 referenceNo (Subelements of complaintManagement)	
type	string
occurs	1
description	referenceNo of complaint management
ISNEWLO010604 deliveryNoteld (Subelements of complaintManagement)	
type	string
occurs	1
description	delivery Note Id of complaint management
ISNEWLO010604 invoiceId (Subelements of complaintManagement)	
type	string
occurs	1
description	invoice Id of complaint management
ISNEWLO010604 experimental	
type	anyType
occurs	0..n
description	section for internal tests at development

```

<xs:complexType name="Item">
  <xs:sequence>
    <xs:element name="remark" type="xs:string" minOccurs="0"/>
    <xs:element name="parties" minOccurs="0" maxOccurs="unbounded">
      <xs:complexType mixed="false">
        <xs:complexContent>
          <xs:extension base="Account">
            <xs:attribute name="role" type="Roles" use="required"/>
          </xs:extension>
        </xs:complexContent>
      </xs:complexType>
    </xs:element>
    <xs:element name="referenceNo" type="xs:string"/>
    <xs:element name="referenceText" type="xs:string" minOccurs="0"/>
    <xs:element name="referenceBarcode" minOccurs="0">
      <xs:complexType>
        <xs:simpleContent>
          <xs:extension base="xs:string">
            <xs:attribute name="encoding" type="BarcodeEncoding"
use="required"/>
          </xs:extension>
        </xs:simpleContent>
      </xs:complexType>
    </xs:element>
    <xs:element name="exchangeMetaData" type="B2BJobDataExchangeMetaData"
minOccurs="0" maxOccurs="unbounded"/>
    <xs:element name="promoId" type="xs:string" minOccurs="0"/>
    <xs:element name="voucherCode" type="xs:string" minOccurs="0"/>
  </xs:sequence>
</xs:complexType>

```

```

<xs:element name="requestedDate" type="xs:date" minOccurs="0"/>
<xs:element name="manufacturer" type="xs:string"/>
<xs:choice minOccurs="0">
  <xs:element name="pair" type="Pair"/>
  <xs:element name="stockLens" type="StockLens"/>
</xs:choice>
<xs:element name="options" minOccurs="0">
  <xs:complexType>
    <xs:sequence>
      <xs:element name="insurance" default="false" minOccurs="0">
        <xs:complexType>
          <xs:simpleContent>
            <xs:extension base="xs:boolean">
              <xs:attribute name="duration" type="xs:duration"/>
            </xs:extension>
          </xs:simpleContent>
        </xs:complexType>
      </xs:element>
    </xs:sequence>
  </xs:complexType>
</xs:element>
<xs:element name="multiplePair" minOccurs="0">
  <xs:complexType>
    <xs:sequence>
      <xs:element name="referenceNo" type="xs:string"/>
      <xs:element name="referenceCountNo" type="xs:integer"
minOccurs="0"/>
      <xs:element name="deliveryNoteId" type="xs:string"
minOccurs="0"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
<xs:element name="complaintManagement" minOccurs="0">
  <xs:complexType>
    <xs:sequence>
      <xs:element name="complaintManagementCode" type="xs:string"/>
      <xs:element name="referenceNo" type="xs:string"/>
      <xs:element name="deliveryNoteId" type="xs:string"
minOccurs="0"/>
      <xs:element name="invoiceId" type="xs:string" minOccurs="0"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
<xs:element name="experimental" type="xs:anyType" minOccurs="0"
maxOccurs="unbounded"/>
</xs:sequence>
</xs:complexType>

```

From:
<https://wiki2.b2boptic.com/> - **wiki2.b2bOptic.com**

Permanent link:
<https://wiki2.b2boptic.com/en:jobdata:version010604:complextypes:item>

Last update: **2021/06/18 12:49**

