


B2BCatalogOldCodes

b2bOpticLensCatalog→lenses→lens
b2bOpticLensCatalog→options→option

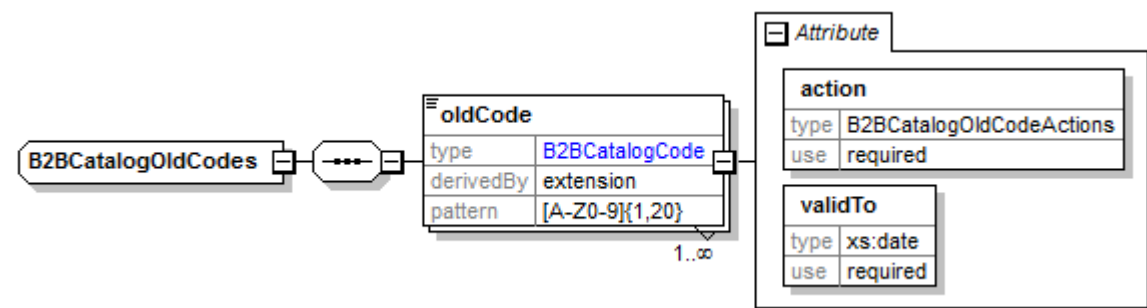

oldCode	
type	B2BCatalogCode
occurs	1..∞
description	old productcode of an lens/option; max 20 characters with capitals or numerics
action (attribute of oldCode)	
type	B2BCatalogOldCodeActions
use	required
description	specifies if the new code (element code in lens/option) is a replacement for the old one or only suggested; a replacement have the same properties and a suggestion is only similar and the user should decide, if the new only is accepted; a replacement must be unique, an old code can only be used at one new product; a suggestion need not to be unique
validTo (attribute of oldCode)	
type	xs:date
use	required
description	the date until the old code was valid

```
<xs:complexType name="B2BCatalogOldCodes">
  <xs:sequence>
    <xs:element maxOccurs="unbounded" name="oldCode">
      <xs:complexType>
        <xs:simpleContent>
          <xs:extension base="B2BCatalogCode">
            <xs:attribute name="action" type="B2BCatalogOldCodeActions"
use="required"/>
            <xs:attribute name="validTo" type="xs:date" use="required"/>
          </xs:extension>
        </xs:simpleContent>
      </xs:complexType>
    </xs:element>
  </xs:sequence>
</xs:complexType>
```

From:
<https://wiki2.b2boptic.com/> - **wiki2.b2bOptic.com**

Permanent link:
<https://wiki2.b2boptic.com/en:lenscatalog:version070000:complextypes:b2bcatalogoldcodes>

Last update: **2016/11/07 17:56**

