


B2BCatalogPriceFields

b2bOpticLensCatalog→header→pricefields

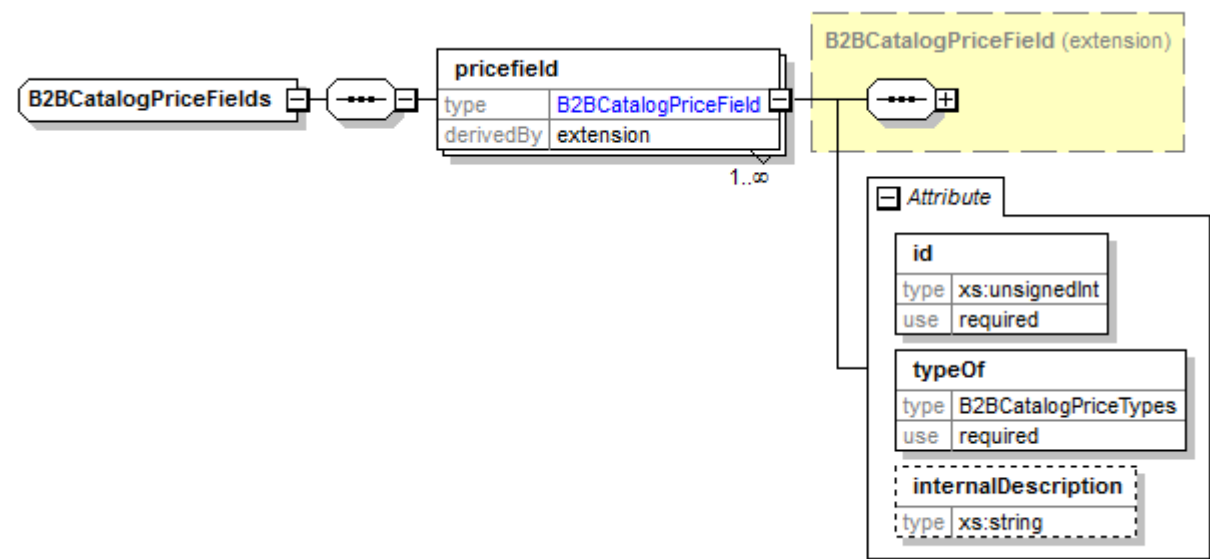

pricefield	
type	B2BCatalogPriceField
occurs	1..∞
description	set of pricefields that are available in the catalog
id (attribute of pricefield)	
type	xs:unsignedInt
use	required
description	id to identify the priecefield
typeOf (attribute of pricefield)	
type	B2BCatalogPriceTypes
use	required
description	which type of pricefield is it
internalDescription (attribute of pricefield)	
type	xs:string
use	optional
description	for internal use only, will not be displayed

```
<xs:complexType name="B2BCatalogPriceFields">
  <xs:sequence>
    <xs:element maxOccurs="unbounded" name="pricefield">
      <xs:complexType>
        <xs:complexContent>
          <xs:extension base="B2BCatalogPriceField">
            <xs:attribute name="id" type="xs:unsignedInt" use="required"/>
            <xs:attribute name="typeOf" type="B2BCatalogPriceTypes"
use="required"/>
            <xs:attribute name="internalDescription" type="xs:string"/>
          </xs:extension>
        </xs:complexContent>
      </xs:complexType>
    </xs:element>
  </xs:sequence>
</xs:complexType>
```

```
</xs:complexContent>  
</xs:complexType>  
</xs:element>  
</xs:sequence>  
</xs:complexType>
```

From:
<https://wiki2.b2boptic.com/> - **wiki2.b2bOptic.com**

Permanent link:
<https://wiki2.b2boptic.com/en:lenscatalog:version070000:complextypes:b2bcatalogpricefields>

Last update: **2017/07/11 14:32**

