


XML-Structure

Root-Element: b2boptic

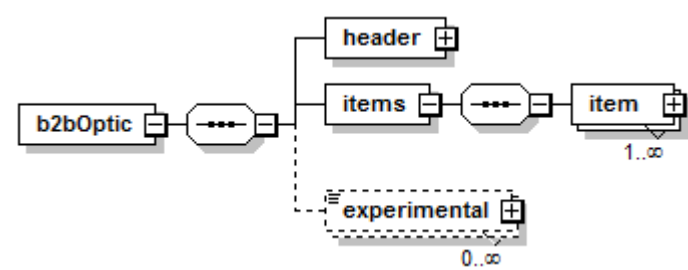

In the root-element the location of the XSD at schema.b2boptic.com should be set, so the receiver could identify the version of XML. In next version it will be mandatory.

```
<b2b0ptic xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xsi:noNamespaceSchemaLocation="http://schema.b2boptic.com/b2boptic_v1.6.0.xsd">
```

header	
type	Header
occurs	1
description	head section with information about all orders in this xml
items	
type	sequence of item
occurs	1
description	main tag that include a list of order items
item (element of items)	
type	Item
occurs	1..n
description	one order
experimental	
type	anyType
occurs	0..n
description	section for internal tests at development

```
<xs:element name="b2b0ptic">
  <xs:complexType>
    <xs:sequence>
      <xs:element name="header" type="Header"/>
      <xs:element name="items">
        <xs:complexType>
          <xs:sequence>
            <xs:element name="item" type="Item" maxOccurs="unbounded"/>
          </xs:sequence>
        </xs:complexType>
      </xs:element>
      <xs:element name="experimental" type="anyType" maxOccurs="unbounded"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

```
<xs:element name="experimental" type="xs:anyType" minOccurs="0"
maxOccurs="unbounded"/>
</xs:sequence>
</xs:complexType>
</xs:element>
```

From:

<https://wiki2.b2boptic.com/> - **wiki2.b2bOptic.com**

Permanent link:

<https://wiki2.b2boptic.com/en:lensorder:version010601:structure>

Last update: **2014/06/17 22:33**

